


## ALUMINIUM AND ZINC ANODES

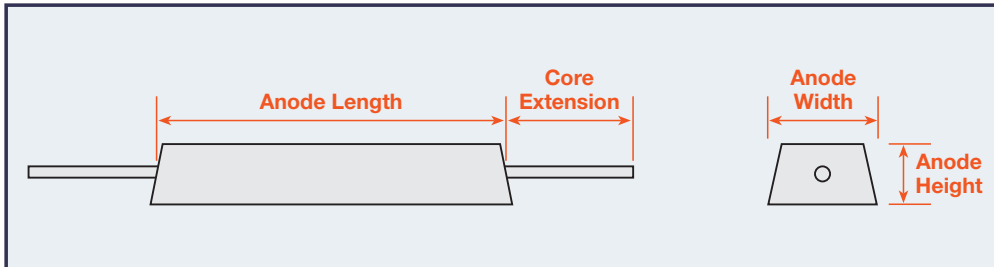

### AL / ZN / IN COMPOSITION:

Specification Code	A Guard
Fe	0.09%
Si	0.08 – 0.120%
Cu	0.003%
Zn	4.5 – 5.5%
In	0.015 – 0.020%
Others (each)	0.02% max
Aluminium	Remainder

### ELECTRO CHEMICAL:

Potential Ag/AgCl	-1.05 Volts
-------------------	-------------

Min Capacity	2500 Ampere. hour / kg
--------------	------------------------

### ZINC COMPOSITION:

Specification Code	US Mil Spec 18001 K
Cu	0.05% max
Al	0.010 – 0.50%
Fe	0.005% max
Cd	0.025 – 0.07%
Pb	0.006% max
Others (total)	0.10% max
Zn	Remainder

### ELECTRO CHEMICAL:

Potential Ag/AgCl	-1.05 +/- 0.05V
-------------------	-----------------

Capacity	780 Ampere. hour / kg min.
----------	----------------------------